

● FEATURES 特性



Low power loss.低功率损耗。

● APPLICATIONS 用途

Useful in a wide variety of EMI/RFI choke,input filter.

用于EMI/RFI扼流圈、输入滤波器。

● PART NUMBERING SYSTEM 品名系统

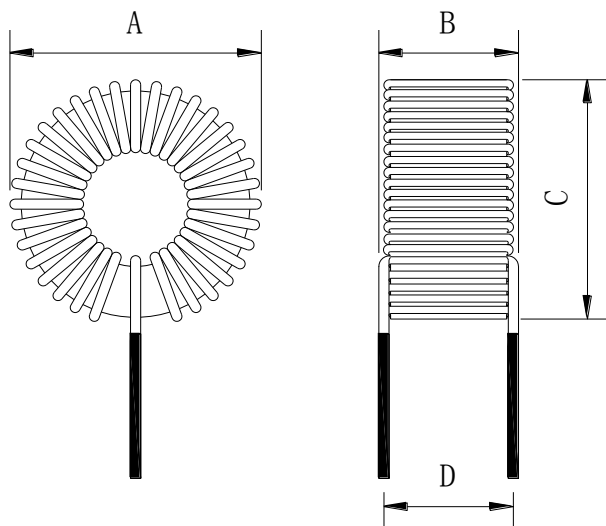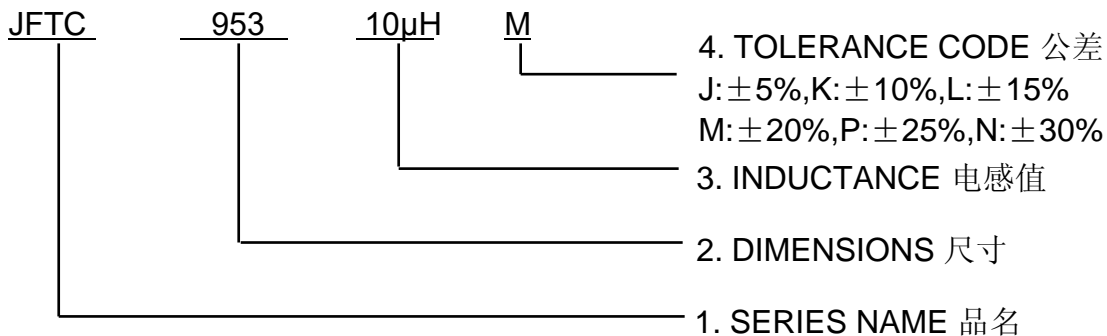

Unit : mm

TYPE	INDUCTANCE	A(mm)	B (mm)	C (mm)	D (mm)	Work Frequency
T6*3*3	1.0uH-50.0uH	8.0	6.0	8.0	4.0	0.01-0.5MHZ
T8*4*4	1.0uH-60.0uH	12.0	8.0	12.0	5.0	0.01-0.5MHZ
T9*5*3	1.0uH-200.0uH	13.0	7.0	14.0	4.0	0.01-0.5MHZ
T10*6*4	1uH-300.0uH	14.0	7.0	14.0	5.0	0.01-0.5MHZ
T12*6*4	1.0uH-400.0uH	16.0	7.0	16.0	5.0	0.01-0.5MHZ
T12.7*7.9*6.35	1.0uH-500.0uH	17.0	9.0	17.0	8.0	0.01-0.5MHZ
T14*9*5	1.0uH-600uH	18.0	8.0	18.0	6.0	0.01-0.5MHZ
T16*12*8	1.0uH-600uH	20.0	12.0	20.0	9.0	0.01-0.5MHZ
T18*10*6	1.0uH-600uH	22.0	10.0	22.0	7.0	0.01-0.5MHZ
T22.5*13.5*8	1.0uH-650.0uH	26.0	12.0	16.0	9.0	0.01-0.5MHZ
T31*13*19	1.0uH-800.0uH	38.0	18.0	38.0	15.0	0.01-0.5MHZ